


E2 - Various technologies for water catchment and spring arrangement

10 March 2012



Table of contents

- 1) What is involved ?
- 2) Why use this means ?
- 3) Who is primarily concerned ?
- 4) What does this process involve ? How is it used ?
 - a) Simplest, most often used method
 - Cross section of a simple catchment (Doc. Caritas Burundi)
 - Source catchment in Burundi (Photo Caritas Burundi)
 - b) Source catchment method including building a filtering or non filtering storage tank
 - Cross section of a quality major spring with a storage tank but no filtration (Doc.RéFEA)
 - Developing a major spring with a storage tank and prior filtration where water is of lesser quality (Doc RéFEA)
 - c) Catchment method with drainage over a large area
 - Spring catchment and connection to a network at Xieng Ngeun (Laos) (Photo un Habitat)
 - Spring catchment and fitting out with washing areas at Yaoundé (Cameroun) (Photo C.Le Jallé PSEau)

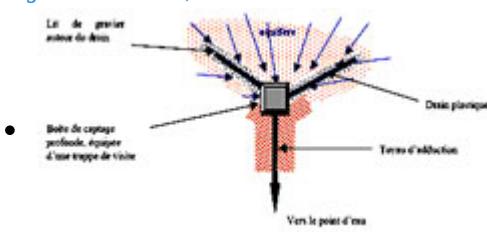

-

- 5) Care required
- 6) Main advantages and drawbacks
 - a) Advantages
 - b) Drawbacks
- 7) Cost
- 8) Achievements examples
- 9) Where to obtain further information ?
 - a) Websites
 - b) Video
 - c) Bibliography

1) What is involved ?

Obtaining quality water by collecting it from its source, through catchment and with improvements so as to avoid the many situations that are still prevalent, as shown here (Photograph from Caritas)



Ethiopia), where populations have no other choice but to draw it from unprotected springs.

2) Why use this means ?

Because this is a **process that is both simple and cheap and has been in use since ancient times** so as to obtain pure water, easily, and close at hand, and most often for free. Spring catchment may also be more sophisticated and combined with the construction of a mini water distribution network using gravity feed to serve one or more villages located away from the catchment location (**Refer to Factsheet E 45 "Construction of mini water networks"**).

3) Who is primarily concerned ?

Essentially the inhabitants of **rural mountain villages** or impoverished areas.

4) What does this process involve ? How is it used ?

There are **three main methods** for capturing and developing a water source : a simple one, another when a tank is added and a drainage method.


The choice of method **depends on spring characteristics** (location, flow, significance, consumption needs to be met). If the spring's emergence is precisely located and at shallow depth (less than two metres) and if the planned water consumption is less than the spring flow rate, then the simplest method is used. In similar cases, but where the flow rate is less than that required by consumption needs, then a storage tank must also be built. Lastly, if the way the spring emerges is diffuse or at a great depth, then drainage is required upstream from the spring.

a) Simplest, most often used method

This can be applied **when the spring emerges easily by itself and with an adequate flow rate**.

The process generally comprises five steps :

- **The first step** comprises, after first studying the terrain, water purity, flow rate, population consumption and expectations, **cleaning**, cutting, weeding, clearing and **terracing** until the ground's waterproof layer is reached, and this with the help of the population, all around the spring.
- The **second step** aims to bring together the streams of water in a well or **catchment box**. A ditch will dug to recover the water a little further along so that it is not polluted by contact with the last layers of terrain that it passes through. Then this ditch is filled with large rocks or stones that filter it, while still allowing it to run easily. Once the filtering is performed using gravel, the end of the trench is fitted with one or more drain pipes and closed off with a blocking wall made from clay or concrete. The catchment box is then covered with mortar. Care must be taken to ensure that it is watertight thanks to a layer of clay or a plastic liner, or preferably, both.
- The **third step** is creating an outer **masonry** work around the capture point and a concrete slab so that the spring area does not become muddy.
- The **fourth step** comprises **protecting** the works, the location and the catchment point (covering the catchment box with a layer of soil and grass, fencing off the reservoir, and putting into place, above and around the source, a protective channel to intercept run off waters and digging a small drainage ditch to take away unused water) as well as **fitting it out**, e.g. by providing small washing areas close by to facilitate the tasks undertaken by women.
- The **fifth step**, after first ensuring that **water purity** is maintained after the works, is to ensure that the population has properly understood the notions of hygiene taught and that the **management committee** or town body that the spring is handed over to does indeed have sufficient expertise, and has taken the necessary measures, for keep the spring in good condition and maintaining it.

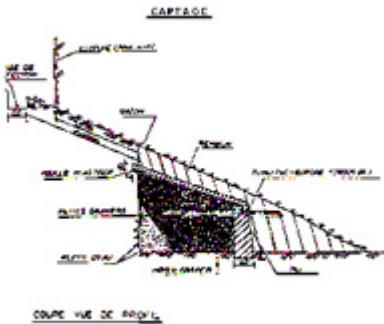

Cross section of a simple catchment
(Doc. Caritas Burundi)





Source catchment in Burundi (Photo Caritas Burundi)

NB If you find yourself in this case, there is no need to refer to the other two method, go to Section 6.

b) Source catchment method including building a filtering or non filtering storage tank

This method is used **when the spring flow rate is too little** to continually provide the population (or network it is connected to) with the amount of water needed, or **when the need is to recover** for other uses (e.g. irrigating neighbouring crops), any water not used at certain times during the day or night.

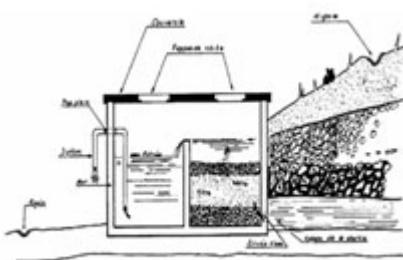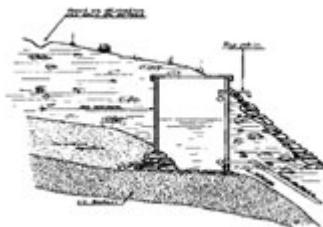

Cross section of a quality major spring with a storage tank but no filtration
(Doc.RéFEA)

Developing a major spring with a storage tank and prior filtration where water is of lesser quality (Doc RéFEA)

Two techniques can be used, depending on the quality of the water collected :

When the water is pure (as it is in most cases), then the spring water is collected by works similar to those described above, but replacing the catchment box with a tank.

When the water needs to be treated first, the method is the same as the one described previously, only the tank comprises two compartments, one of which contains a gravel and sand filter. The water penetrates, it, rises through the layers of gravel and sand and runs off after filtering over the other side of the separator. Then the water is taken from the tank by a siphon or sent onto a distribution network.

c) Catchment method with drainage over a large area

This method is used **when the spring emerges over a wide and diffuse area** that often leads the terrain to take on a swampy appearance. Water catchment then requires a number of drains.


These drains are perforated pipes that are buried in the ground so that water can be drawn from an aquifer simply through gravity. They are most often prefabricated but they can also be made up easily on-site using PVC pipe partially sawn or drilled and by closing off one end by melting it. They can also be made using pottery or rocks. Note that such drains are also placed sometimes to increase the capacity of a

simple catchment area.

Why fit drains ? Because when a ditch is dug in ground that is gorged with water, ready to fit a drain, then the water table naturally draws down and the diffuse water present in the ground tends naturally to run by gravity towards the drain.



Spring catchment and connection to a network at Xieng Ngeun (Laos) (Photo un Habitat)

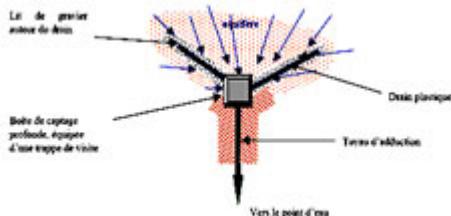

Spring catchment and fitting out with washing areas at Yaoundé (Cameroun) (Photo C.Le Jallé PSEau)



The drains carry the water to the **spring catchment box**. Fitted in ditches, they collect runoff water, carrying it towards the catchment box. When suitably laid out to catch as many trickles of water as possible, they are placed right in the bottom of the ditch, on a bed of gravel when the water is not too muddy. If not, then the drain is completely covered with a layer of gravel, preferably cleaned and graded gravel, some twenty centimetres deep providing a kind of filtration, thereby improving the quality of the drainage. The complete ditch is covered with a geo-textile or woven synthetic cloth type protective covering. It is also possible to insert sand between the gravel and the cloth to avoid tearing the cloth and ensure every tighter spacing between the gravel and the geo-textile layer to improve filtering. Once complete, the works are covered with soil.

The water is collected in a catchment box that must be big enough that it can be inspected and maintained. It is taken to the outlet by a pipe.

5) Care required

- Be sure to maintain the newly developed site, especially by defining a safety perimeter around it, so as to protect it from all kinds of pollution (fertilisers, animal excrement) that would pollute the water collected. If necessary, to protect the installation from erosion, fit runoff water catchment ditches.

- The level of water in the catchment basin must always remain below the level at which the spring water emerges** before the works start, or it may no longer be possible to collect spring water. It is therefore wise to also fit a basin overflow pipe.

- It is necessary to closely involve the population in choosing, preparing and maintaining spring.**

Where drainage catchment is used :

- A prior terrain study must be carried out with great care to determine where to located trenches, at what depth and what kind of drainage is required (if the area is a very extensive one, then envisage a number of drainage systems in a T or Y layout, leading to the same catchment box).

- Drainage profoundly changes the terrain where it is fitted. This is because the terrain surface that was previously soaked with water will dry out through water table drawdown and the countryside will change along with the vegetation, and surrounding populations need to be made aware of this.

6) Main advantages and drawbacks

a) Advantages

The water collected is generally of very good quality and can be consumed directly.

The water points used are often traditional ones well known to the population (causing no change in

habits and making it easy and safe to use).

The water flow is generally a regular and sustainable one, but this must be checked out first, although there may be major seasonal changes in flow rates.

The cost of setting up this installation is low. The works are durables so long as at least some surveillance is included.

b) Drawbacks

Where drainage is needed :

- Significant expertise is required to perform the work and the cost is greater,
- Care is required during the work (as trenches may collapse or subside),
- The site will require maintenance and the landscape will change.

7) Cost

The cost varies depending on the location and the characteristics of the spring, but a few examples offer some pointers. Generally, total cost barring complications, is significantly **less than €1,000**.

In the Democratic Republic of Congo, the average cost (including management fees and the cost of hygiene awareness, but not including labour provided almost for free by the population) of springs put in place by CARITAS was **€670** for the first programme of 515 springs. For the current 660 spring programme, where considerable effort has been made to train the population and management committees, the cost is **€810**.

Another example, this time in Burundi, shows an average cost for the 143 springs currently being set up and equipped with washing basins by CARITAS, is **€620**, excluding the cost of management and training. The cost of setting up a complete mini water supply network six kilometres in length, from a spring, with drain chambers, tanks and standpipes, all as part of the same programme comes to €47,700. The rehabilitation of three other networks with an average length of 12 km does however have an average cost of only €16,000. The low maintenance costs will be covered by participation on the part of the population of some €0.07 per cu. metre from beneficiaries connected up to the network and a lump sum payment from others.

8) Achievements examples

1) CARITAS programs in the Democratic Republic of Congo and in Burundi

- In DRC, in Kivu, Caritas started work in 2008 with European Union aid, on a three year programme to catch and development 660 springs, as well as providing hygiene and management awareness for 44,000 families displaced by the belligerents and who were in this way able to return to their villages (at a cost of €534,000). CARITAS is completing another program to set up 515 more springs, jointly financed by the Ministry of Foreign Affairs (€345,000).

- In Gitega province, in Burundi, CARITAS with aid from SEDIF (the Paris Region Water Utility), is undertaking a programme to complete 143 springs, rehabilitate four drinking water supply networks (with a total length of 42 kilometres), to benefit 48,000 people and to build a rainwater collection system and latrines in five remote schools (at a total cost of €410,000).

(Additional information is available from the Africa Department at the Department for International Action, Secours Catholique - Caritas France, 106 Rue du Bac, 75007 Paris, France).

2) INTER AIDE programme in Ethiopia (Sadoye) : Catchments with drainage

This programme offers the advantage of showing that it is possible to overcome unforeseen difficulties. This is because this catchment project was far from effortless, especially as regards digging the trenches. The terrain had a tendency to subside due to land subsidence, as the land was especially waterlogged...

Details could be found in an article available from :

[<http://www.interaide.org/>]

9) Where to obtain further information ?

a) Websites

☒- **OIE (International Office for Water)** and its access to various websites such as the RéFEA network (a French language telematics centre covering water, where you will find a **number of handy factsheets** that are short and to the point : <http://www.oieau.fr/PotablAutres/1SourceAmenagmtPG.PDF>

- **Inter Aide** (an international solidarity association in Versailles, France) : Two clear documents that are illustrated and easy to use covering spring catchment that can be downloaded directly from the following two addresses :

<http://www.interaide.org/>

- **PSEau (the water solidarity programme)** : www.pseau.org . In French, from “Rechercher”, type “Sources”.

- **SKAT** (Swiss agency for development and cooperation) : A very complete, illustrated 52 page book **only available in English**, on “Spring catchment”. It can be downloaded from : <http://www.skat.ch/>

b) Video

Daily motion : A short two minute video “How to find a spring ?” showing how a dowser works with twigs. Available from : <http://www.dailymotion.com/video/x4...>

c) Bibliography

Action contre la faim : “Eau - Assainissement - Hygiène pour les populations à risque”

A 745 page French work where Chapters 10 and 11 relate to spring water catchment and set up.

- Emplacement : Accueil > en > Wikiwater > Technical sheet > Facilitating access to water > Searching >
- Adresse de cet article : <https://wikiwater.fr/e2-various-technologies-for-water>