

E36 - Advantages and disadvantages of hand pumps. How to select and maintain them?

20 March 2012



Table of contents

- 1) Main advantages and drawbacks



Togolese villagers using a Afridev pump,
Photo by Caritas

- 2) The importance of choosing the right hand pump
- 3) The criteria for choosing a hand pump



Illustration WELL

- 4) The importance of maintenance and ease of maintenance




Pump on a well in Kaya- Photo by Caritas TOGO

- 5) Where can you find more information about maintenance issues ?

1) Main advantages and drawbacks

The **main advantage** of hand pumps is that they are **one of the most economical and simple solutions** for providing a collective supply of drinking water in rural areas and suburban environments. They also help to eliminate the risks of people, and children in particular, falling into open wells. **They also improve the conditions of hygiene** under which water is drawn off, by eliminating the use of buckets of uncertain cleanliness, thereby limiting diseases associated with contaminated water.

**Togolese villagers using a Afridev pump,
Photo by Caritas**

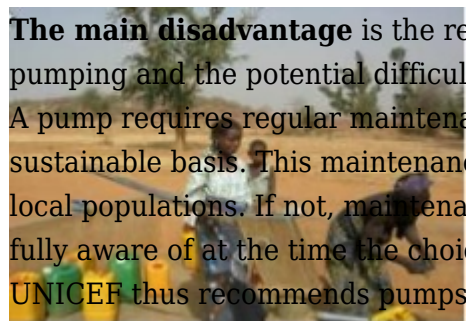

The main disadvantage is the required **maintenance**, the significant **physical exertion** required for pumping and the potential difficulty of being supplied with **spare parts** which may not be easy to obtain. A pump requires regular maintenance which must be carried out if the pump is to be used on a sustainable basis. This maintenance may be provided for several models, which should be preferred by local populations. If not, maintenance and repair may have a relatively high cost that people should be fully aware of at the time the choice is made.

UNICEF thus recommends pumps benefiting from its **VLOM** (Village Level Operation and Management of maintenance) label, in other words, robust pumps that can be fully maintained locally, either by the community members themselves or by a technician that they can call out quickly, and which are also produced locally and selected, managed and maintained by the community. (**Examples** : Afridev, Tara, Bluepump and Vergnet pumps, etc.)

In addition, the **spare parts** that may be required are rarely manufactured in developing countries, especially in the case of metal or cast iron parts. This is the main advantage of PVC pumps the parts of which are less expensive and can often be made on site.

One of the **main causes of a pump's deterioration**, aside from its frequent use, is the quality of the pumped water. Corrosive water can cause premature ageing of parts. The water then takes on a bitter taste and affects the colour of food cooked in it and clothing washed in it. The materials that withstand corrosion best are : plastic, stainless steel, wood, glass fibre. Another factor wear is sand or other abrasives in the pumped water.

2) The importance of choosing the right hand pump

The operating and maintenance principles of these pumps specified in the **previous fact sheet E 35 "Water hand pumps"** which it is recommended that you refer to first if you have not already done so, have probably already convinced you of this.

Indeed, it is essential to know how to choose the pump model best suited, both technically and financially as well as in terms of ease and cost of maintenance. **There are unfortunately countless examples of pumps, or even wells and boreholes, being abandoned** as a result of a poor choice, incorrect use, lack of maintenance or the inability to obtain spare parts or the services of a qualified repair technician.

In a survey conducted by **Unicef** in 2007, it was, for example, estimated that **more than 125,000 pumps had been abandoned in Africa** with a corresponding loss of \$2.5 billion. But a lot were also abandoned elsewhere... In several countries such as Malawi, the proportion of pumps abandoned was estimated to be 40%...



3) The criteria for choosing a hand pump



Illustration WELL

The choice of a pump depends not only on technical criteria and its price, but also on the economic environment (possibility of easily finding spare parts and people able to maintain or repair it) but also on the **social environment** (public acceptance of the pumping system) **and**, last but not least, **its ease and cost of maintenance**.

There will thus be a need to **first gather certain information** such as :

- the pump's type of use (family, small community, village and whether it is for intensive use or not)
- the depth of the well or borehole,
- the delivery head,
- the desired pump flow rate,
- the quality of the water table (clear or turbid and laden with sand or corrosive matter)
- **the price range** acceptable to the community.

Indeed, the price of hand pumps varies, depending on the way they are manufactured, their use and their resilience, **from fifty euros** for shallow depths **to €2,200** for the most expensive, the most powerful



and the most resilient ones, with most **mid-range** but reliable pumps costing between **500 and 800 euros**. Their price also most often varies according to the depth of the well or borehole and the country. **It is advisable, at the same time, to look at which types of pumps are most widely used, reliable and long lasting in the region concerned** as well as how satisfied their users are with them, as it is better to buy a pump model that has already been successfully used for several years than a new model even if a bit cheaper but which has yet to prove itself and which does not have any real after-sales service in terms of spare parts and maintenance relatively nearby.

Having provided the **pump seller** with all the related data and requirements and asked for a proposal, **it is advisable to also ask**, if you have not already done so, for the pump's total delivery head and flow rate. These data are generally presented in the form of graphs (or charts), and most often the graph of the flow rate versus the pump's installation depth. This may, for example, avoid you choosing a pump that is either too powerful or not powerful enough given the depth of the well or borehole.

Note that the greater the delivery head, the smaller the pump cylinder must be, in particular to make the hydraulic force on the piston compatible with the average permissible force exerted. One survey indicated that most of the pumps used in rural Africa descended to a depth of forty metres and had an average flow rate of around 1 m³/h.

An important factor in choosing a pump will obviously be its price (purchase and installation). There would be no point in buying an expensive pump for a shallow, inexpensive well. It is advisable, however, **not to focus too much on the cheapest pumps. Indeed, it seems much better to pay slightly more for a pump that is likely to last longer and be easier to repair and maintain in serviceable condition**, together with efficient after-sales service and maintenance.

4) The importance of maintenance and ease of maintenance



Pump on a well in Kaya- Photo by Caritas TOGO

A pump's service life and actual cost are largely based on these factors. Experience shows that **it is often more difficult to implement an effective, sustainable, low cost maintenance programme than it is to install a pump**.

UNICEF has, moreover, created a label (**VLOM**, see previous fact sheet) which it assigns to the pumps it recommends as being locally made and above all able to be easily maintained, and even repaired, in most cases, by village communities.

So, when faced with a choice between several similar or competitor models of pumps and **if there are no critical technical requirements** (depth, corrosive water, etc.), it is advisable **to take a decision based on the following factors :**

- Pump manufactured or preferably assembled in the country concerned and/or for which it is easy to obtain spare parts and, in the event of a serious fault, find a qualified repair person nearby.
- Simplicity of the pump's mechanism and ease of access for its maintenance (for example, to replace piston seals),
- Straightforward routine maintenance able to be carried out by the village community,
- Lightweight and compact for ease of handling without the need for heavy lifting gear (which is rarely the case anyway for rod type pumps),
- Finally, ability of mechanisms to withstand the presence of sand or corrosive elements, or the water

point created

Once the choice of the pump has been made in liaison with the **pump or water point management committee**, which should be set up quickly if not yet done, steps should be taken to make sure that the pump is properly maintained and training given to those able to check it or at least carry out minor repairs.

For this purpose, reference should first be made to manufacturers' instructions and their maintenance manuals which should be requested. In particular, and this obviously depends on the pump model involved, steps should be taken to **regularly check** the tightness of bolts, **grease** moving parts and, to prevent premature wear of the existing shafts on several types of pumps as a result of not being provided with self-lubricating bearings, regularly **lubricate** moving shafts, periodically **replace**, on the models concerned, the sealing rings to prevent a decrease in pump flow rate and frictional wear of the cylinder, **listen** to feedback from users **and provide for** periodic overhaul.

5) Where can you find more information about maintenance issues ?

-**Inter Aide** : Booklet (in english) relating a common maintenance experience with RWSN in Malawi.

http://www.rural-water-supply.net/_...

- **WEDC** (Loughborough University, G.B.) : interesting fact sheet, **in English, entitled** "Maintaining handpumps"

<http://www.lboro.ac.uk/well/resourc...>

- **RWSN** (Rural Water Supply Network) : Example of a pump maintenance illustrated fact sheet :

<http://www.rwsn.ch/documentation/pr...>

- Emplacement : Accueil > en > Wikiwater > Technical sheet > Facilitating access to water > Distributing >
- Adresse de cet article : <https://wikiwater.fr/e36-advantages-and-disadvantages>